

SUPER-ELASTIC

ELTOR® 3

ELTOR® 3 NON MARKING



STRUCTURE

- Minimal deformation while carrying loads.
- Adequate specific surface pressure.
- Higher vehicle stability.





COMPOUND

- Smooth running, low rolling resistance, low battery and fuel consumption.
- Excellent grip in any circumstance, and improved resistance to wear.

DESIGN


- Correct tread/space ratio.
- Vibrations reduced to a minimum.

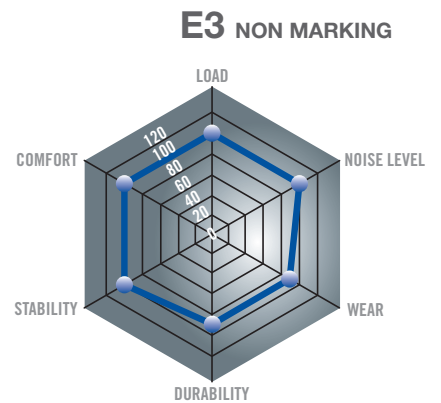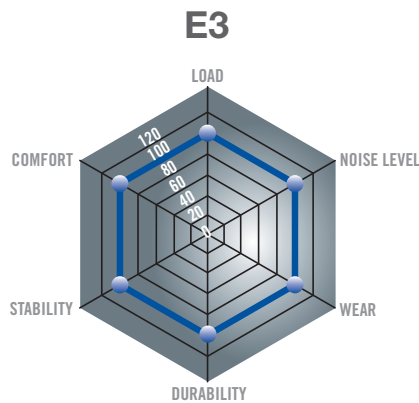

NM
NON MARKING



AS
ANTISTATIC



HL
HIGH CAPACITY



M+S
GRIP



S
SPECIAL



SUPER-ELASTIC ELTOR® 3

Ø	TYRE SIZE (INCHES)	PROFILE	RIM SIZE	TYRE DIMENSIONS (1)		WEIGHT (kg) ± 2%	LOAD CAPACITY (KG) AT MAX SPEED (KM/H) (2)				
				W (mm) ± 2%	D (mm) ± 2%		CARRYING WHEEL 25 km/h	STEERING WHEEL 25 km/h	TRAILERS (3)		
							25 km/h	25 km/h	25 km/h	10 km/h	6 km/h
4"	3.00-4	E1	2.10-4	76	250	3,5	260	195	195	235	260
	4.00-4	E3	2.50C-4	101	303	6,6	535	412	412	485	535
6"	3.50/4.00-6	E3	3.75-6	112	311	7	410	315	315	370	410
	140/55-6	E3	4.50-6	131	311	8,3	1.070	825	825	970	1.070
8"	4.00-8	E3	3.00D-8	100	403	10,3	950	730	730	860	950
	4.00-8	E3 FIX	3.00D-8	100	403	10,6	950	730	730	860	950
	5.00-8	E3	3.00D-8	123	455	16,6	1.415	1.090	1.090	1.285	1.415
	5.00-8	E3 FIX	3.00D-8	123	455	16,9	1.415	1.090	1.090	1.285	1.415
	5.00-8	E3	3.25D-8	123	455	16,3	1.415	1.090	1.090	1.285	1.415
	15x4½-8 (125/75-8)	E3	3.00D-8	109	375	9,3	1.040	800	800	940	1.040
	15x4½-8 (125/75-8)	E3 FIX	3.00D-8	109	375	9,5	1.040	800	800	940	1.040
	15x4½-8 (125/75-8)	E3	3.25D-8	107	377	9,2	1.040	800	800	940	1.040
	16x6-8 (150/75-8)	E3	4.33R-8	150	418	16,5	1.455	1.120	1.120	1.320	1.455
	16x6-8 (150/75-8)	E3 FIX	4.33R-8	150	418	16,8	1.455	1.120	1.120	1.320	1.455
	18x7-8 (180/70-8)	E3	4.33R-8	148	448	19,8	2.145	1.650	1.650	1.945	2.145
	18x7-8 (180/70-8)	E3 FIX	4.33R-8	148	448	20	2.145	1.650	1.650	1.945	2.145
18x9-8	E3	7.00E-8	214	454	29,5	2.300	1.900	1.900	2.090	2.300	
9"	140/55-9	E3	4.00E-9	130	380	10	1.170	900	900	1.060	1.170
	140/55-9	E3 FIX	4.00E-9	130	380	10,3	1.170	900	900	1.060	1.170
	6.00-9	E3	4.00E-9	139	522	25,3	1.885	1.450	1.450	1.710	1.885
	6.00-9	E3 FIX	4.00E-9	139	522	25,6	1.885	1.450	1.450	1.710	1.885
	21x8-9 (200/75-9)	E3	6.00E-9	182	520	33,2	2.755	2.120	2.120	2.505	2.755
	21x8-9 (200/75-9)	E3 FIX	6.00E-9	182	520	33,6	2.755	2.120	2.120	2.505	2.755
10"	6.50-10	E3	5.00F-10	163	570	35,5	2.340	1.800	1.800	2.125	2.340
	6.50-10	E3 FIX	5.00F-10	163	570	35,7	2.340	1.800	1.800	2.125	2.340
	6.50-10	E3	5.50F-10	163	570	35	2.570	1.975	1.975	2.335	2.570
	7.50-10	E3	5.50F-10	176	636	49,8	3.070	2.360	2.360	2.785	3.070
	200/50-10	E3	6.50F-10	193	457	24	2.470	1.900	1.900	2.240	2.470
	200/50-10	E3 FIX	6.50F-10	193	457	24,8	2.470	1.900	1.900	2.240	2.470
	23x9-10 (225/75-10)	E3	6.50F-10	194	578	44,1	3.445	2.650	2.650	3.125	3.445
	23x9-10 (225/75-10)	E3 FIX	6.50F-10	194	578	44,5	3.445	2.650	2.650	3.125	3.445
12"	7.00-12	E3	5.00S-12	168	649	45,9	2.920	2.240	2.240	2.645	2.920
	7.00-12	E3 FIX	5.00S-12	168	649	46,6	2.920	2.240	2.240	2.645	2.920
	23x10-12	E3	8.00G-12	227	580	47,4	3.770	2.900	2.900	3.420	3.770
	23x10-12	E3 FIX	8.00G-12	227	580	47,8	3.770	2.900	2.900	3.420	3.770
	27x10-12	E3	8.00G-12	237	669	69,6	3.900	3.000	3.000	3.450	3.900
	27x10-12	E3 FIX	8.00G-12	237	669	70,4	3.900	3.000	3.000	3.450	3.900
	315/45-12	E3	10.00G-12	285	574	55,9	4.485	3.450	3.450	4.070	4.485
	315/45-12	E3 FIX	10.00G-12	285	574	56,7	4.485	3.450	3.450	4.070	4.485
	13"	23x5-13	E3	3.75P-13	138	612	32	1.470	1.135	1.135	1.340
23x5-13		E3 FIX	3.75P-13	138	612	32,8	1.470	1.135	1.135	1.340	1.470
15"	7.00-15	E3	5.5-15	178	723	55,7	3.545	2.725	2.725	3.215	3.545
	7.00-15	E3 FIX	5.5-15	178	723	56,2	3.545	2.725	2.725	3.215	3.545
	200-15	E3	6.5-15	204	710	60	3.160	2.430	3.160	2.865	2.430
	200-15	E3 FIX	6.5-15	204	710	60,5	3.160	2.430	3.160	2.865	2.430
	250-15 (250/70-15)	E3	7.0-15	217	715	66,5	4.750	3.650	3.650	4.300	4.750
	250-15 (250/70-15)	E3 FIX	7.0-15	217	715	67,3	4.750	3.650	3.650	4.300	4.750
	250-15 (250/70-15)	E3	7.5-15	217	715	66,6	4.750	3.650	3.650	4.300	4.750
	250-15 (250/70-15)	E3 FIX	7.5-15	217	715	67,8	4.750	3.650	3.650	4.300	4.750
	7.50-15	E3	5.50-15	205	750	67,4	3.880	2.980	2.980	3.510	3.880
	7.50-15	E3 FIX	5.50-15	205	750	68,5	3.880	2.980	2.980	3.510	3.880
	7.50-15	E3	6.0-15	205	750	69,6	3.900	3.000	3.000	3.540	3.900
	7.50-15	E3 FIX	6.0-15	205	750	70	3.900	3.000	3.000	3.540	3.900
	7.50-15	E3	6.5-15	205	750	70,2	3.900	3.000	3.000	3.540	3.900
7.50-15	E3 FIX	6.5-15	205	750	71,7	3.900	3.000	3.000	3.540	3.900	

(1) Sizes are intended for tyres not fitted on rims;

(2) Capacity values indicated are in reference to ELTOR tyres mounted on vehicles whose speed with no cargo is less than 25 km/h (according to E.T.R.T.O. standards);

(3) Only for interior courses inferior to 2.000 metres; if otherwise, contact dealer (according to E.T.R.T.O. standards).

SUPER-ELASTIC **ELTOR® 3**



Ø	TYRE SIZE (INCHES)	PROFILE	RIM SIZE	TYRE DIMENSIONS (1)		WEIGHT (kg) ± 2%	LOAD CAPACITY (KG) AT MAX SPEED (KM/H) (2)					
				W (mm) ± 2%	D (mm) ± 2%		CARRYING WHEEL 25 km/h	STEERING WHEEL 25 km/h	TRAILERS (3)			
									25 km/h	10 km/h	6 km/h	
15"	28x9-15 (8.15-15)	E3	7.0-15	217	693	59,6	3.445	2.650	2.650	3.125	3.445	
	28x9-15 (8.15-15)	E3 FIX	7.0-15	217	693	60,7	3.445	2.650	2.650	3.125	3.445	
	28x12½-15	E3	9.75-15	285	711	88,5	5.525	4.250	4.250	5.015	5.525	
	28x12½-15	E3 FIX	9.75-15	285	711	89,6	5.525	4.250	4.250	5.015	5.525	
	8.25-15	E3	6.5-15	209	812	87,2	4.750	3.650	3.650	4.300	4.750	
	8.25-15	E3 FIX	6.5-15	209	812	88,3	4.750	3.650	3.650	4.300	4.750	
	300-15 (315/70-15)	E3	8.0-15	258	816	109,2	5.850	4.500	4.500	5.310	5.850	
	300-15 (315/70-15)	E3 FIX	8.0-15	258	816	110	5.850	4.500	4.500	5.310	5.850	
	355/65-15 (350-15)	E3	9.75-15	300	816	130,3	7.800	6.000	6.000	7.085	7.800	
	355/65-15 (350-15)	E3 FIX	9.75-15	300	816	131,7	7.800	6.000	6.000	7.085	7.800	
20"	400/60-15	E3	11.0-15	332	817	145,6	8.970	6.900	6.900	8.140	8.970	
	400/60-15	E3 FIX	11.0-15	332	817	147	8.970	6.900	6.900	8.140	8.970	
	7.50-20	E3	6.00T-20	211	880	88,4	3.840	3.200	3.200	3.520	3.840	
	7.50-20	E3	7.0-20	211	880	90	4.020	3.350	3.350	3.670	4.020	
	8.25-20	E3	6.00T-20	206	941	107,8	4.400	3.675	3.675	4.335	4.400	
	8.25-20	E3	6.50-20	206	941	109	4.400	3.675	3.675	4.335	4.400	
	8.25-20	E3	7.0-20	206	941	110	4.400	3.675	3.675	4.335	4.400	
	9.00-20	E3	6.5-20	241	989	143,6	5.340	4.450	4.450	4.885	5.340	
	9.00-20	E3	7.0-20	241	989	149,2	5.340	4.450	4.450	4.885	5.340	
	10.00-20	E3	7.0-20	258	1.011	163,5	6.000	5.000	5.000	5.455	6.000	
	10.00-20	E3	7.5-20	258	1.011	165,6	6.000	5.000	5.000	5.455	6.000	
	10.00-20	E3	8.0-20	258	1.011	166,7	6.000	5.000	5.000	5.455	6.000	
	11.00-20	E3	8.0-20	261	1.086	200,5	6.510	5.245	5.245	5.910	6.510	
	12.00-20	E3	8.0-20	267	1.099	211	7.500	6.250	6.250	6.810	7.500	
	12.00-20	E3	8.5-20	267	1.099	218	7.500	6.250	6.250	6.810	7.500	
	12.00-20	E3	10.0-20	303	1.099	255	7.765	6.470	6.470	7.050	7.765	
	24"	12.00-24	E3	8.5-24	281	1.183	239	7.980	6.650	6.650	7.250	7.980
		14.00-24	E3	10.0-24	353	1.300	387	11.000	9.175	9.175	9.990	11.000

(1) Sizes are intended for tyres not fitted on rims;

(2) Capacity values indicated are in reference to ERTOR tyres mounted on vehicles whose speed with no cargo is less than 25 km/h (according to E.T.R.T.O. standards);

(3) Only for interior courses inferior to 2.000 metres; if otherwise, contact dealer (according to E.T.R.T.O. standards).