

SUPER-ELASTIC

ELTOR® 5

ELTOR® 5 NON MARKING



STRUCTURE



- Compact construction for forklift truck higher stability.

COMPOUND

- Maximum grip.
- High quality compound to guarantee high resistance to wear.

DESIGN


- Higher tread depth for max. tyre life.
- Additional bars to stabilize the tread blocks and ensure regular running and uniform wear.
- Profile XL.

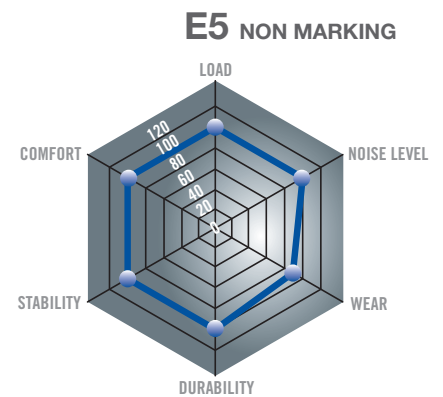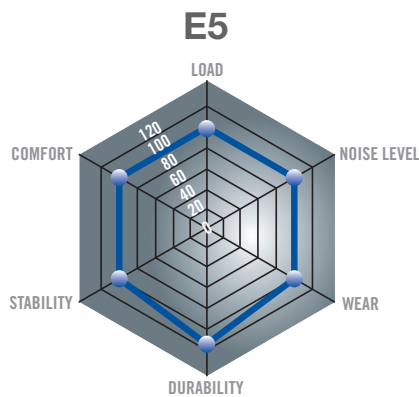

NM
NON MARKING



AS
ANTISTATIC



HL
HIGH CAPACITY



M+S
GRIP



S
SPECIAL



SUPER-ELASTIC ELTOR® 5

Ø	TYRE SIZE (INCHES)	PROFILE	RIM SIZE	TYRE DIMENSIONS (1)		WEIGHT (kg) ± 2%	LOAD CAPACITY (KG) AT MAX SPEED (KM/H) (2)				
				W (mm) ± 2%	D (mm) ± 2%		CARRYING WHEEL 25 km/h	STEERING WHEEL 25 km/h	TRAILERS (3)		
							25 km/h	25 km/h	25 km/h	10 km/h	6 km/h
8"	5.00-8	E5	3.00D-8	120	458	17,1	1.415	1.090	1.090	1.285	1.415
	5.00-8	E5 FIX	3.00D-8	120	458	17,2	1.415	1.090	1.090	1.285	1.415
	15x4½-8 (125/75-8)	E5	3.00D-8	109	377	9,4	1.040	800	800	940	1.040
	15x4½-8 (125/75-8)	E5 FIX	3.00D-8	109	377	9,7	1.040	800	800	940	1.040
	16x6-8 (150/75-8)	E5	4.33R-8	151	421	17,1	1.455	1.120	1.120	1.320	1.455
	16x6-8 (150/75-8)	E5 FIX	4.33R-8	151	421	17,4	1.455	1.120	1.120	1.320	1.455
	18x7-8 (180/70-8)	E5	4.33R-8	152	453	20,2	2.145	1.650	1.650	1.945	2.145
	18x7-8 (180/70-8)	E5 FIX	4.33R-8	152	453	20,5	2.145	1.650	1.650	1.945	2.145
9"	140/55-9	E5 FIX	4.00E-9	130	380	11,8	1.170	900	900	1.060	1.170
	6.00-9	E5	4.00E-9	139	525	26,1	1.885	1.450	1.450	1.710	1.885
	6.00-9	E5 FIX	4.00E-9	139	525	26,4	1.885	1.450	1.450	1.710	1.885
	21x8-9 (200/75-9)	E5	6.00E-9	183	522	34,2	2.755	2.120	2.120	2.505	2.755
	21x8-9 (200/75-9)	E5 FIX	6.00E-9	183	522	34,6	2.755	2.120	2.120	2.505	2.755
10"	6.50-10	E5	5.00F-10	160	575	36,6	2.340	1.800	1.800	2.125	2.340
	6.50-10	E5 FIX	5.00F-10	160	575	36,8	2.340	1.800	1.800	2.125	2.340
	200/50-10	E5	6.50F-10	189	464	25,6	2.470	1.900	1.900	2.240	2.470
	200/50-10	E5 FIX	6.50F-10	189	464	26,1	2.470	1.900	1.900	2.240	2.470
	23x9-10 (225/75-10)	E5	6.50F-10	195	581	46	3.445	2.650	2.650	3.125	3.445
	23x9-10 (225/75-10)	E5 FIX	6.50F-10	195	581	46,3	3.445	2.650	2.650	3.125	3.445
12"	7.00-12	E5	5.00S-12	169	658	47,6	2.920	2.240	2.240	2.645	2.920
	7.00-12	E5 FIX	5.00S-12	169	658	48,3	2.920	2.240	2.240	2.645	2.920
	23x10-12	E5	8.00G-12	227	586	49,9	3.770	2.900	2.900	3.420	3.770
	23x10-12	E5 FIX	8.00G-12	227	586	50,6	3.770	2.900	2.900	3.420	3.770
	27x10-12	E5	8.00G-12	235	672	73,5	3.900	3.000	3.000	3.450	3.900
	27x10-12	E5 FIX	8.00G-12	235	672	74,3	3.900	3.000	3.000	3.450	3.900
15"	250-15 (250/70-15)	E5	7.0-15	214	721	66,5	4.750	3.650	3.650	4.300	4.750
	250-15 (250/70-15)	E5 FIX	7.0-15	214	721	67	4.750	3.650	3.650	4.300	4.750
	250-15 (250/70-15)	E5	7.5-15	214	721	67,5	4.750	3.650	3.650	4.300	4.750
	250-15 (250/70-15)	E5 FIX	7.5-15	214	721	68,5	4.750	3.650	3.650	4.300	4.750
	7.50-15	E5	5.50S-15	205	758	72,2	3.880	2.980	2.980	3.510	3.880
	7.50-15	E5 FIX	5.50S-15	205	758	72,7	3.880	2.980	2.980	3.510	3.880
	7.50-15	E5	6.5-15	205	758	72,9	3.900	3.000	3.000	3.540	3.900
	7.50-15	E5 FIX	6.5-15	205	758	74,2	3.900	3.000	3.000	3.540	3.900
	28x9-15 (8.15-15)	E5	7.0-15	214	699	61,8	3.445	2.650	2.650	3.125	3.445
	28x9-15 (8.15-15)	E5 FIX	7.0-15	214	699	62,2	3.445	2.650	2.650	3.125	3.445
	28x12½-15	E5	9.75-15	285	716	91	5.525	4.250	4.250	5.015	5.525
	28x12½-15	E5 FIX	9.75-15	285	716	92	5.525	4.250	4.250	5.015	5.525
	8.25-15	E5	6.5-15	203	822	90,9	4.750	3.650	3.650	4.300	4.750
	8.25-15	E5 FIX	6.5-15	203	822	92,4	4.750	3.650	3.650	4.300	4.750
	300-15 (315/70-15)	E5	8.0-15	256	821	114	5.850	4.500	4.500	5.310	5.850
300-15 (315/70-15)	E5 FIX	8.0-15	256	821	114,9	5.850	4.500	4.500	5.310	5.850	
355/65-15 (350-15)	E5	9.75-15	300	821	135,2	7.800	6.000	6.000	7.085	7.800	
355/65-15 (350-15)	E5 FIX	9.75-15	300	821	136,1	7.800	6.000	6.000	7.085	7.800	
20"	10.00-20	E5	7.0-20	258	1018	165	6.000	5.000	5.000	5.455	6.000
	10.00-20	E5	7.5-20	258	1018	167	6.000	5.000	5.000	5.455	6.000
	10.00-20	E5	8.0-20	258	1018	169	6.000	5.000	5.000	5.455	6.000
	12.00-20	E5	8.0-20	267	1104	219	7.500	6.250	6.250	6.810	7.500
	12.00-20	E5	8.5-20	267	1104	226	7.500	6.250	6.250	6.810	7.500

(1) Sizes are intended for tyres not fitted on rims;

(2) Capacity values indicated are in reference to ELTOR tyres mounted on vehicles whose speed with no cargo is less than 25 km/h (according to E.T.R.T.O. standards);

(3) Only for interior courses inferior to 2.000 metres; if otherwise, contact dealer (according to E.T.R.T.O. standards).