


CAMSO SL R4

WEARABLE TREAD WEIGHT (%) - BASED ON 16.9-28



LUG HEIGHT ADVANTAGE

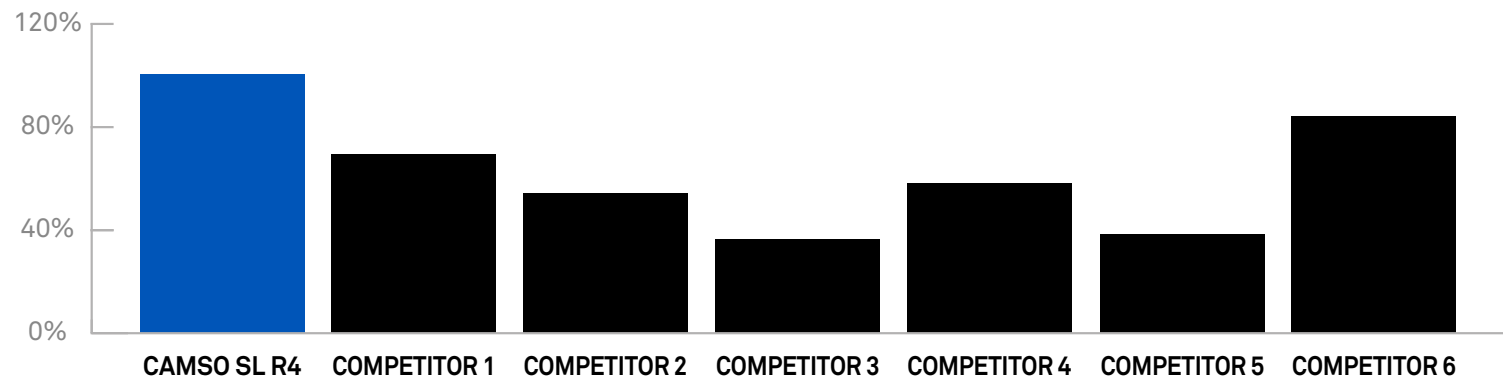

CAMSO SL R4



BACKHOE LOADERS



AUTHORIZED DISTRIBUTOR:

camsoco.com



HEAVY-DUTY DURABILITY AND TRACTION

Designed for extended tire life, heavy-duty durability and superior traction in severe off-road conditions.

camsoco.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SL R4



HEAVY-DUTY CARCASS

- Improves stability and side impact resistance

HAULER STEPPED TREAD DESIGN

- Improves self-cleaning and stone ejection for excellent traction



OPTIMIZED LUG-TO-VOID RATIO WITH EXTRA-DEEP TREAD

- Increases tread life and off-road traction

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [PSI]	APPLICATION	MAXIMUM TIRE LOAD [kg] [lb]				
			Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]					Static	8 km/h 5 mph	16 km/h 10 mph	40 km/h 25 mph	50 km/h 30 mph
10.5/80-18	10	TBLS	W9x18	W8x18 9x18	873.0	282.0	22	119	A6	4	DRIVE	3220	1770	1645	1225	-
					34.4	11.1	28					7100	3900	3650	2700	-
					873.0	282.0	22	131		4	FREE ROLLING	3220	2540	2360	1755	-
					34.4	11.1	28					7100	5600	5200	3850	-
12.5/80-18	12	TBLS	W9x18	11x18	958.0	292.0	27	129	A6	4	DRIVE	4375	2410	2240	1665	-
					37.7	11.5	34					9650	5300	4950	3700	-
					958.0	292.0	27	142		4	FREE ROLLING	4375	3450	3205	2385	-
					37.7	11.5	34					9650	7600	7100	5250	-
12.5/80-18	14	TBLS	W9x18	11x18	950.0	292.0	27	134	A6	4	DRIVE	4980	2760	2565	1910	-
					37.4	11.5	34					11000	6100	5650	4200	-
					950.0	292.0	27	146		4	FREE ROLLING	4980	3900	3630	2700	-
					37.4	11.5	34					11000	8600	8000	5950	-
14.9-24	12	TBLS	W13x24	W11x24, W12x24	1238.0	403.0	30	145	A8	3	CYCLIC	6670	4230	3885	2900	2640
					48.7	15.9	38					14700	9350	8600	6400	5850
					1238.0	403.0	30	145		3	CONSTANT	6670	3500	3275	2900	2640
					48.7	15.9	38					14700	7750	7250	6400	5850
16.9-24	12	TBLS	W15Lx24	W14Lx24	1300.0	444.0	27	149	A8	3	CYCLIC	7475	4745	4355	3250	2960
					51.2	17.5	34					16500	10450	9600	7150	6550
					1300.0	444.0	27	149		3	CONSTANT	7475	3930	3675	3250	2960
					51.2	17.5	34					16500	8700	8100	7150	6550
17.5L-24	10	TBLS	W15Lx24	W14Lx24	1258.0	445.0	30	144	A8	2	CYCLIC	6440	4090	3750	2800	2550
					49.5	17.5	38					14200	9050	8300	6200	5650
					1258.0	445.0	30	144		2	CONSTANT	6440	3380	3165	2800	2550
					49.5	17.5	38					14200	7450	7000	6200	5650
17.5L-24	12	TBLS	W15Lx24	W14Lx24	1243.0	448.0	28	149	A8	3	CYCLIC	7475	4750	4355	3250	2960
					48.9	17.6	35					16500	10500	9600	7150	6550
					1243.0	448.0	28	149		3	CONSTANT	7475	3930	3675	3250	2960
					48.9	17.6	35					16500	8700	8100	7150	6550
19.5L-24	12	TBLS	DW16Ax24	W16x24	1312.0	485.0	28	151	A8	2	CYCLIC	7475	5240	4625	3450	3140
					51.7	19.1	35					16500	11550	10200	7600	6950
					1312.0	485.0	28	151		2	CONSTANT	7475	4450	3900	3450	3140
					51.7	19.1	35					16500	9800	8600	7600	6950

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [PSI]	APPLICATION	MAXIMUM TIRE LOAD [kg] [lb]				
			Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]					Static	8 km/h 5 mph	16 km/h 10 mph	40 km/h 25 mph	50 km/h 30 mph
19.5L-24	14	TBLS	DW16Ax24	W16x24	1322.0	505.0	28	155	A8	3	CYCLIC	8915	5890	5195	3875	3525
					52.0	19.9	35					19700	13000	11450	8550	7800
					1322.0	505.0	28	155		3	CONSTANT	8915	5000	4380	3875	3525
					52.0	19.9	35					19700	11050	9650	8550	7800
21L-24	12	TBLS	DW18Ax24	W18Lx24	1390.0	534.0	38	155	A8	2	CYCLIC	8915	5660	5195	3875	3525
					54.7	21.0	48					19700	12500	11450	8550	7800
					1390.0	534.0	38	155		2	CONSTANT	8915	4680	4380	3875	3525
					54.7	21.0	48					19700	10350	9650	8550	7800
18.4-26	12	TBLS	W16Lx26	DW16A, W15Lx26	1430.0	494.0	28	156	A8	3	CYCLIC	9200	5840	5360	4000	3640
					56.3	19.4	35					20300	12900	11850	8850	8050
					1430.0	494.0	28	156		3	CONSTANT	9200	4830	4520	4000	3640
					56.3	19.4	35					20300	10650	10000	8850	8050
16.9-28	12	TBLS/TT	W15Lx28	W14Lx28	1427.0	455.0	33	152	A8	3	CYCLIC	8165	5180	3800	3550	3230
					56.2	17.9	42					18000	11450	8400	7850	7150
					1427.0	455.0	33	152		3	CONSTANT	8165	4290	3690	3550	3230
					56.2	17.9	42					18000	9450	8150	7850	7150
18.4-28	12	TBLS/TT	W16Lx28	W15Lx28	1500.0	504.0	39	157	A8	3	CYCLIC	9490	6020	5530	4125	3755
					59.1	19.8	49					20950	13300	12200	9100	8300
					1500.0	504.0	39	157		3	CONSTANT	9490	4980	4660	4125	3755
					59.1	19.8	49					20950	11000	10300	9100	8300
16.9-30	14	TBLS/TT	W15Lx30	W14Lx30	1444.0	444.0	31	154	A8	3	CYCLIC	8625	5475	5025	3750	3415
					56.9	17.5	39					19050	12100	11100	8300	7550
					1444.0	444.0	31	154		3	CONSTANT	8625	4530	4240	3750	3415
					56.9	17.5	39					19050	10000	9350	8300	7550